

Rec'd PCT/PTO 28 MAR 2005
PCT/IL 03/00783



מדינת ישראל
STATE OF ISRAEL

REC'D 27 NOV 2003	
WIPO	PCT


Ministry of Justice
Patent Office

משרד המשפטים
לשכת הפטנטים

This is to certify that
annexed hereto is a true
copy of the documents as
originally deposited with
the patent application
of which particulars are
specified on the first page
of the annex.

זאת לתעודה כי
רצופים בזה העתקים
נכונים של המסמכים
שהופקדו לכתחילה
עם הבקשה לפטנט
לפי הפרטים הרשומים
בעמוד הראשון של
הנספח.

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

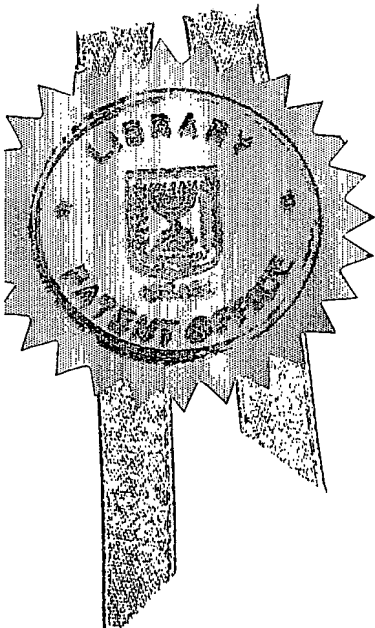

This 19-10-2003 היום
רשם הפטנטים
Commissioner of Patents

נתאשר
Certified

לשימוש הלשכה
For Office Use

152029

Number

חאריך:
Date

30-09-2002

הוקדם/נדרחה
Ante/Post- dated

חוק הפטנטים, התשכ"ז-1967
PATENTS LAW, 1967-5727

בקשה לפטנט
PATENT APPLICATION

אני, (מג'ינק טכנולוגיות תצוגה בע"מ - ח.ד. 3670 מבשרת ציון 90805)
I (magink display technologies ltd. P.O.Box 3670 Mevasseret Zion 90805 Israel)

בעל אמצאה מכת _____ מכח הדין _____
Owner, by virtue of _____ of an invention, the title of which is:


התקן LCD עם צבעים ברורים

Distinct Color LCD Apparatus

(בעברית)
(Hebrew)
(באנגלית)
(English)

hereby apply for a patent to be granted to me in respect thereof.

מבקש בזאת כי ינתן לי עליה פטנט.

בקשה חלוקה Application for Division		*בקשה פטנט מוסף* Application for Patent of Addition		*דרישה דין קדימה* Priority Claim		
מבקש פטנט from application	לבקשה/לפטנט to Patent/Appl.	מספר/סימן Number/Mark	חאריך Date	מדינת האיגוד Convention Country		
No _____ dated _____	No _____ dated _____					
*יפוי כח: כללי/מיוחד - רצוף בזה / ענוד יוגש P.O.A.: general / specific - attached / to-be-filed-later- הוגש בענין _____ Has been filed in case _____						
המען למסירת הודעות ומסמכים בישראל Address for Service in Israel Chaim Scheff magink display technologies ltd. 1 Yizreel St. P.O.Box 28051 Jerusalem חיים שף מג'ינק טכנולוגיות תצוגה בע"מ רחוב יזרעאל 1 ח.ד. 28051 ירושלים						
חתימת המבקש Signature of Applicant		שנה of the year	בחודש of	היום This		
						

REFERENCE:

סימוכין:

טופס זה, כשהוא מוטבע בחותם לשכת הפטנטים ומושלם במספר ובחאריך ההגשה, הינו אישור להגשת הבקשה שפרטיה רשומים לעיל
This form, impressed with the Seal of the Patent Office and indicating the number and date of filing, certifies the filing of the application, the particulars of which are set out above.

מחק את המיותר Delete whatever is inapplicable

Distinct Color LCD Apparatus

התקן LCD עם צבעים ברורים

Distinct Color LCD Apparatus

התקן LCD עם צבעים ברורים

Field of the Invention

Generally, the present invention relates to Liquid Crystal technology based Display devices and to components and methods use therewith. More specifically, the present invention relates to an improved high contract Liquid Crystal Display apparatus.

Background of the Invention

Multi-color Cholesteric Liquid Crystal Display (LCD) devices are generally constructed with at least two glass-encapsulated parallel layers of disparate Liquid crystal materials wherein each layer has a respectively parallel addressing scheme of substantially transparent conductor to predetermined regions in each layer. Cholesteric liquid crystal display devices can be either mono-color or multicolor.

Mono-color devices typically have one liquid crystal layer and multicolor typically have two or more liquid crystal layers. Each of these predetermined layers has an upper glass conductor location and an opposite lower glass conductor location such that a specific voltage even between the two will "drive" the liquid crystal material there-between into a desired optical state. Three such optical states are commonly encountered and are planar, Homeotropic, and focal-conic.

Most current liquid crystal displays use a nematic-based technology in which two states are used. The twisted nematic device is the most common.

One state is the field-applied state and the second is a non-field applied state. In most cases, the field on state consists of molecules that are aligned with their long molecular axis parallel to the electric field direction (and induced Homeotropic State). The field off state is an aligned homogeneous state (long molecular axis parallel to the glass substrates). Both states are optically transparent. To achieve gray level intermediate states intermediate voltage levels are used. The position of the molecules is observed by using polarized light and the molecules of the liquid crystal phase act as variable "retarders" to the polarized light. It is generally desired in the LCD industry to achieve high graphic resolution (ultra small pixels), video refresh rates, variable "gray" levels for each color layer, and to use low voltage.

Furthermore, there has been an industry trend to use various levels of focal-conic (FC) state to enable LCD displays. There is a peculiar disadvantage to FC since, at the substantially zero gray level, the FC is partially opaque; thereby placing a limit on the contrast level achievable by such a display device. This, in turn, reduces the area of a color space represented polygon (usually a triangle – such as for red-green-blue or cyan-magenta-yellow), which makes the colors appear much less vivid than they do in the larger area representation – where the distance between most distant colors is further.

Specifically, bi-stable display modes such as the cholesteric liquid crystal display traditionally operate between two stable states (planar and focal conic); an applied electric field is used to transfer between these states usually via a meta-stable state (Homeotropic State). The planar state consists of an aligned helix of molecules the molecules lie substantially parallel to the glass substrates and it reflects light of a specific wavelength that is proportional to the pitch length of the cholesteric liquid crystal. Any light scattering that does occur is not intended and the phase is substantially transparent. The focal conic state consists of many randomly arranged cholesteric helices that are too small to reflect light but can cause scattering

of incident light. This state is therefore not transparent but slightly light scattering. This reduces the contrast and limits the color gamut in multicolor devices; thus, the colors are less vivid. The contrast between these two states is emphasized by the use of a black absorber placed behind the layer(s) of liquid crystal that absorbs transmitted light. The observer then either sees only the reflected ray from the planar texture or the black absorber that is apparent when the cholesteric liquid crystal is in the focal conic texture. Intermediate gray levels arise from areas that are brought into a state that has both states present. If several different color layers are used and each is in the planar texture wavelengths from the entire visible spectrum can be reflected and the device appears white. By selecting the layers that will reflect many colors can be reflected including gray levels of these colors.

It is an amazing historical anomaly that in such displays the two stable states have been almost exclusively used. This anomaly is all the more remarkable given the preponderance of new LCD applications – especially the use of LCD coupled with a memory media as a facile replacement for printed paper (such as billboards, magazines, newspapers, and textbooks) where there is a longstanding need for a high contrast LCD.

Summary of the Invention

The present invention relates to embodiments of a distinct color LCD apparatus (mono or multicolor) including: at least two layers of respectively disparate encapsulated liquid crystal materials; structural means for maintaining the layers proximate to each other and in a substantially parallel orientation; electrically conductive means for addressing at least one substantially parallel address across the encapsulated liquid crystal material in each of the respective layers; and coordinated with the means for addressing, an electrical pulse driving means - wherein a state is selected from the list Homeotropic and planar, and

whereby the state is communicated to a predetermined address between one of the parallel layers.

Simply stated, maintaining the Homeotropic State at a location in an encapsulated liquid crystal layer requires continuously driving an electrical waveform through that portion of the layer – in order to maintain that location in a substantially homogeneously aligned orientation. The waveform must substantially be of sufficient voltage to move the liquid crystal material into the desired state. This voltage, referred to as the critical voltage or V_4 on an Electro-Optical Curve, is dependent on numerous physical factors – such as temperature LC layer thickness, etc. When the orientation of the molecules of the liquid crystal phase are substantially perpendicular to the layer, the location in the layer is “perceived” as being totally transparent – meaning that it allows unobstructed substantially non-opaque viewing of any underlying layer (e.g. another liquid crystal layer, or a black or colored absorber back); in the at least two layers. Alternatively, when the waveform at this voltage is discontinued, then the LC material proceeds through a rapid transition to a planar state – which is the LC specific colored state.

For practical purposes, a synthetic perceivable gray level can be maintained by “managing” the location with a predetermined duration in the Homeotropic State (induced nematic), a predetermined duration in the planar state, and remaining fractional duration’s in transition between planer and Homeotropic States or between Homeotropic and planar states. Simply stated, a 50% gray level would require about 50% of the time in Homeotropic State and about 50% of the time in planar state. Nevertheless, care is advised in selecting the frequency of the duration fragments in each state so that there is little or no appearance of visual flicker – gray level instability or fluctuation.

Accordingly, embodiments of the present invention may be characterized as relating to reflective display apparatus which are based on dynamic materials that

reflect the incident light, having a predetermined optical spectrum, partly in the original spectrum components and partly in other spectral signature components, simultaneously being transparent for a portion of the incident light and absorbing a portion of the incident light energy. The dynamic quality of these materials allows active manipulation of these transparent and reflective components and of their respective spectral signatures.

Generally, there are two specifically interesting manifestations of embodiments of the present invention: a pixel matrix architecture and single pixel architecture. The pixel matrix architecture is comprised of a plurality of substantially parallel layers each respectively containing an encapsulated dynamic material (e.g. LC) and preferably having a common (to the plurality of encapsulations) black back layer; wherein there is a multi-pixel address-ability in each layer (of dynamic material encapsulation). Alternatively, the single pixel architecture does not require complex internal layer segmentation to facilitate partitioned address access for manipulating portions of the dynamic material, but preferably also includes a black (light absorbent) back layer.

In the preferred case of the present invention, the address or access parameter is use to drive encapsulated LC using electric fields, thereby manipulating the material into Homeotropic State or planar state. In the Homeotropic State, incident light substantially traverses through the layer; which is essentially maximally transparent for most optical frequencies of incident light – substantially neither reflective nor opaque. Accordingly, the incident light arrives at the next layer of the plurality of layers (in multicolor devices) where it is subject to similar electric field manipulation decision, etc. or proceeds to the back most layer – which is preferably black. It should be noted that the electric field in each layer is essentially parallel to the line of the observer – and of like alignment from layer to layer in the plurality. This orientation of the electric field provides optimal predetermined frequency reflectivity. In our experiments, the driving to induce the Homeotropic State is approximately 6 to 7 volts per micron

thickness of the liquid crystal layer. The nematic to Homeotropic transition is a field effect and thus quoted as volts per micron cell thickness. Typically, for our cells, it is about 7v (depends to a small extent on polyimide thickness on the ITO, alignment type, and cell gap).

5

The preferred back layer is black – having maximum absorption in optical frequencies. (However in some mono-color devices this may be colored to allow other effects such as blue and white displays.) Alternatively, the black may be tinted to compensate for the frequency response of the most-proximate encapsulated layer- when in the Homeotropic State. The use of maximal absorption black enhances the overall contrast of the display.

10

15

20

The Homeotropic State is maintained using fixed voltage or using electric pulses or the likes (as is described in detail below). Preferably, advantage is made of the physics wherein LC rapidly traverses from state to state with the application of the electric field; essentially within the first few milliseconds or so. Accordingly, the present invention is also applicable to video frame rate applications. Specifically, selection of a time slot during a single video frame allows calibration of the level of layer transparency with respect to the level of color reflectivity – thereby allowing precise control of the reflective spectrum from each respective addressable area.

25

30

The following chart presents experimental measurements made on a VL 7"x7" module. (Measurement Temperature: Approximately 25~30 Celsius) The basic specification for the VL module is a three cell "sandwich" where each cell is made of two sheets of glass coated with ITO (a clear conductive layer) and a PI (polyimide) layer. For the blue and green cells the cell gap is ~5 microns while for the red layer the cell gap is slightly thicker – closer to 6 microns. The front layer blue LC is Merck MDA-00-3906. The middle layer green LC is Merck MDA-00-6907. The back layer red LC is Merck MDA-01-1. The common back

layer (behind the three colored layers) is a substantially light absorbent black - Z-65/GL black absorbent paint designed for screen-printing on glass.

	Percent Reflectance	X of Chromaticity diagram (CIE 1931)	Y of Chromaticity diagram (CIE 1931)	Contrast Ratio
<i>Improved Prior art driving – (electric pulses in decay envelope)</i>				
Green	15.2	0.23	0.35	
Blue	7.91	0.17	0.18	
Red	11.7	0.37	0.34	
\\		0.23	0.35	7.20
Black	3.47	0.24	0.26	
White	25	0.26	0.3	
<i>Best enabling Mode of the Present Invention</i>				
Green	14.7	0.24	0.4	
Blue	6.59	0.16	0.16	
Red	8.08	0.46	0.37	
\\		0.24	0.4	49.36
Black	0.51	0.31	0.33	
White	25.4	0.26	0.3	
<i>Prior Art driving</i>				
Green	14.4	0.23	0.36	
Blue	8.26	0.18	0.18	
Red	10.4	0.38	0.34	
\\		0.23	0.36	6.16
Black	3.83	0.24	0.27	
White	23.6	0.25	0.29	

Now, looking at the architectures from the vantage of a parallel single controlled stack having a single pixel front surface area, the pixel reflects predetermined elected color by combining the results of setting certain layers to reflective state and certain layers to transparent state; or setting all to transparent state thereby allowing observation of the back most black layer. Each layer, with its particular encapsulated LC material, includes respective address-ability for the necessary access & activation of electric field.

It should be noted that embodiments of the present invention allow integration with other driving modes of LC materials in the encapsulated multi-layer apparatus. For example, an LC layer (pixel element) may be set to a semi-Homeotropic State – allowing partial opacity (scattering) of the incident light and

partial transparency. This is especially useful for achieving a broad variety of gray levels. Likewise, partial Homeotropic States are maintained using fixed voltage or using electric pulses or the likes. For example, gray levels may be specified using fixed voltage pulses of predetermined duration and using variable frequency. This permits maintaining stable frequency signature reflectivity from the perspective of an observer who perceptually averages a plurality of millisecond time slots into a single gray level or color setting. It is especially facile for an apparatus, according to the present invention, to allow the observer to perceptually average transparent states with reflective states; thereby facilitating observation of time averaged intermediate states. Substantially, this technique facilitates video frame rates; with full freedom to simultaneously set and maintain a broad variety of gray levels.

Brief Description of the Figures

In order to understand the invention and to see how it may be carried out in practice, embodiments including the preferred embodiment will now be described, by way of non-limiting example only, with reference to the accompanying drawings, in which:

Figure 1 illustrates a schematic view of a two layer distinct color LCD apparatus;

Figures 2 illustrate schematic views of a method for providing distinct color in an LCD apparatus; and

Appendix 1 wherein is presented a 23 slide power-point presentation related to general aspects of driving a module of three layer distinct color multi-pixels apparatus.

Detailed Description of the Invention

When a nematic liquid crystal is aligned such that the long axis of the molecules are perpendicular to the glass (or other) substrate it is said to be

aligned Homeotropically. Usually two surfaces are used to form a thin film of liquid crystal and the nematic director propagates through the cell without any significant overall deviation. (The molecules undergo some thermal motion that makes them spin and wobble such that at any instant the molecules are locally not at 90 degrees to the substrates but on average over larger areas the average to 90 degrees.) This can be achieved either by surface aligning agents that usually lower the surface energy so that the molecules prefer to take up this position spontaneously or it can be induced by an electric field independent of any aligning agents that may be on the surface of the substrate.

Further, an induced nematic such as that created when a cholesteric liquid crystal of positive dielectric anisotropy has an electric field applied to it that is above the critical field (or V_4) to unwind the cholesteric helix, this is also known to be an Homeotropic texture.

The Homeotropic texture of a nematic phase (real or induced) is characterized by having its optic axis perpendicular to the substrate and therefore, in normal use, is also parallel to the incident light that is usually shone perpendicular to the substrates. Thus, when light is shone on this structure it is not deviated or polarized because the light is passing along the optic axis. Light scattering does not occur as the liquid crystal is effectively aligned as a single crystal with no changes of changes in refractive index along the light propagation direction. Thus, it appears very clear or transparent to light (as long as the liquid crystal does not absorb the light which is usually the case).

This state is well known as the ON State in for example twisted nematic liquid crystal displays (where an electric field generates the Homeotropic State). It is also well known as the Off State in vertically aligned liquid crystal displays (where surface aligning agents generate the alignment).

It has been used in cholesteric displays by Harada who used it as one state in a device that switched between a scattering focal conic texture and a clear state (induced Homeotropic nematic).

5 Thus, the nematic Homeotropic State is well known and used in many displays as one state.

10 The transparency of this state has now been used to provide the black state of a surface stabilized cholesteric texture display. Conventionally this device operates between two long-term stable states that exist at zero voltage. The Homeotropic State is used as means to convert one stable state to another; it is used as meta-stable state. However, while one state is highly colored (the planar state) the other stable state is light scattering to some degree that depends on alignment and liquid crystal factors. Turning to Appendix 1, the operation of
15 such a device that has a black absorbing material at the back of the device such that a transmitted light is absorbed. In the clear state created by the light scattering focal conic state the black is degraded by the scattering texture and this reduces the contrast ratio of the device (specified as the reflectance of the colored planar state / reflectance of the FC state).

20 The present invention uses the clear Homeotropic State rather than the opaque focal conic state as a base state, and this choice that leads to a much better black state and thus better contrast ratio than known mono or multi-layer (stacked) LCDs provide.

25 Turning to figure 1, the present invention relates to embodiments of a distinct color LCD apparatus including: at least two layers (101, 102) of respectively disparate encapsulated liquid crystal materials (103, 104); structural means (105, 106) for maintaining the layers proximate to each other and in a substantially parallel orientation; electrically conductive means (107, 108, 109,
30 110) for addressing at least one substantially parallel address across the

encapsulated liquid crystal material in each of the respective layers; and coordinated with the means for addressing, an electrical pulse driving means (111) - wherein a state is substantially selected from the list Homeotropic and planar and whereby the state is communicated to a predetermined address between one of the parallel layers. In principle, the list of states may include slightly less threshold to Homeotropic State and the substantially planar state that it "drops" into when the voltage is removed, focal conic state (which may be useful is a layer closest to a black back plate), or other substantially repeatable optical states. Nevertheless, the election and modulation between Homeotropic and planar states yields the characteristic maximum contrast improvement of the instant invention.

According to different aspects of the present invention, at least one layer of the at least two layers is a pair of glass (or plastic as appropriate to the application, etc.) plates; or the at least two layers includes a front plate made of glass (112); or a back plate made of glass and a back plate (113) made of a nonvolatile inert solid material. Glass (or transparent plastic - again, as appropriate) plates are preferable because they are substantially optically transparent, mechanically contributory to maintaining structural integrity, and chemically non-reactive. Nevertheless, other like materials may be used including various known plastics. Furthermore, once the structural integrity is addressed, such as by a glass plate or by a pair of glass plates or by using a rigid back surface, then an embodiment of the instant invention provides that the at least two layers includes at least one interstitial membrane; being lighter in weight than glass or plastic and having adequate optical and chemical properties.

According to the preferred embodiment of the instant invention, the back plate is colored black. Alternatively, the back plate is transparent or reflective or dichroic or colored with a predetermined spectral bias selected to enhance color characteristics of the most proximate encapsulated LCD material in the at least two layers.

According to another aspect of the present invention, the respectively
disparate encapsulated liquid crystal materials are each capable of sustaining a
transparent state (Homeotropic) and are each capable of sustaining a
substantially unique color reflective state (planar). The at least two layers of
LCD material of the instant apparatus preferably includes a combination selected
from the list: a red layer and a green layer and a blue layer; a cyan layer and a
magenta layer and a yellow layer; a red layer and a green layer; an orange layer
and a blue layer; a yellow layer and a magenta layer. Furthermore, according to
a novel embodiment of the instant apparatus, the combination further includes at
least one "color" layer selected from the list: a black near ultra violet layer; a
black near infra red layer; a black visible spectrum absorptive layer (preferably
the layer furthest from an observer); or the likes.

According to a further aspect of the present invention, the electrically
conductive means are oriented substantially perpendicular across the
encapsulated liquid crystal material in each of the respective layers – thereby
easily facilitating addressable pixels of known optical states from normal
viewing angles. Nevertheless, there may be other arrangements of conductive
means where by the driving voltage is from one place on a surface of an
encapsulated layer through (or across) the LC material to another place on the
same surface or on an opposite surface.

According to a different aspect of the present invention, the electrically
conductive means include ITO on facing surfaces of a layer of the at least two
layers. However, according to the threshold voltage requisite to drive to the
Homeotropic State, according to another instant embodiment, the electrically
conductive means include vapor deposited conductors on facing surfaces of a
layer of the at least two layers.

The planar cholesteric phase reflects Bragg reflection a specific bandwidth of wavelengths that are determined by the liquid crystal mixture. This is usually about 100 nm bandwidth. By using three different color films that reject red, green and blue light stacked together, a white reflection can be achieved.

In the table below is shown data on stacked films of this type and the reflectance of the planar state (white) and focal conic state (FC) and Homeotropic State (H) for an earlier version of the VL module (presented above). The reflectance of the Homeotropic State is shown to be much lower than that of the focal conic state.

State of Red cell	State of Green cell	State of Blue cell	Percent Reflectance	X of Chromaticity diagram (CIE 1931)	Y of Chromaticity diagram (CIE 1931)	Contrast Ratio
Planar	Planar	Planar	28.2	.266	.316	
FC	FC	FC	4.24	.252	.29	6.6
H	H	H	2.17	.256	.284	12.9

Thus by using the Homeotropic States in each cell the CR (contrast ratio) is substantially doubled due to the improved non-opaque perception of the "black" layer behind the three colored layers that are held in a transparent state (H/H/H).

To implement this regime the cell must have a sustaining voltage applied to the areas that need to be Homeotropic. Gray levels can be accomplished by for example dividing the time-period of a frame into several parts and addressing the pixel such that it is Homeotropic for a limited period only. The eye averages out this dithering such that it sees only a partial reflectance value rather than the full reflectance value; i.e. it sees a gray level. This can be done for each color. The planar states are produced in the conventional fast switch off from the Homeotropic texture to zero volts or a voltage below V1 (V1 substantially is the voltage below which there is no effect on the planar liquid crystal state "optical

texture". Above V1, the planar texture is gradually converted to a focal conic texture. – Note that the planar texture is after the influence of an electric pulse (See Appendix 1.) – specifically after a rapid voltage transition from a voltage above V1 to a voltage below V1 albeit preferably to zero voltage.)

5

According to the preferred aspect of the present invention, the electrical pulse driving means includes a Time Domain modulated signal and the signal is elected to have substantially at least one portion of an ensemble of portions providing a Homeotropic State and substantially at least one portion of the ensemble of portions providing a planar state; thereby facilitating maintaining a predetermined gray level – as detailed in the summary section (above). Furthermore, according to a practical aspect of the present invention, the electrical pulse driving means includes a waveform selected from the list: Alternating Current (AC), Balanced Direct Current (bDC), Time Balanced Modulated Charges (tbMC), a combination of the aforesaid, any of the aforesaid within a predetermined decay envelope, or the likes.

10

15

In the present context: AC relates to equal contiguous portions of positive and negative voltage; bDC relates to proximate portions of positive and negative voltage which collectively comprise equal positive and negative areas of respective time multiplied by respective voltage; and tbMC relates to proximate portions of first positive and second positive voltages (or of first negative and second negative voltages) which collectively comprise equal areas of respective time multiplied by respective voltage, wherein the first voltage is applied to one surface of the encapsulated layer of LC material and the second voltage is applied to the other surface of the encapsulated layer – thereby substantially resulting in a nevertheless desires stable situation of no net charge available to migrate in the layer.

20

25

Furthermore, the waveform for the voltage areas is preferably square for purposes of threshold activation & deactivation efficiency, but allowably having

30

other shapes such as trapezoidal, sinusoidal, saw-toothed, combinations of the aforesaid, or the likes. Nevertheless, it should be noted that voltage areas illustrated as square (or rectangular) are actually slightly trapezoidal in practice since there is generally a miniscule ramp-up time and a miniscule ramp-down decay time in most familiar electronic drive electronic circuits. Drive time of Homeotropic State is reached by applying a continuous bipolar pulse - the pulse length can be varies. Longer pulses require lower voltage but the frequency of the applied voltage is visible. Voltage required for Homeotropic State ~7 to 10V per micron thickness (depending on LC type, PI type, PI thickness etc.). Furthermore, our experiments suggest that some additional improvement may be achieved by squeezing the waveform into a decay envelope.

According to a pragmatic aspect of the present invention, the electrical pulse driving means includes a controller for optimizing refresh time across an ensemble of the substantially parallel addresses. This controller may selectively interleave its refresh and modulation tasks among a large ensemble of addresses according to logic familiar to designers of storage display tubes, or to logic familiar to driving for raster display tubes, or according to temperature management modeling consistent with a large surface of relatively high voltage driven LCD layers, or the likes. Likewise, according to another pragmatic aspect of the present invention, the electrical pulse driving means includes a controller for minimizing duty cycle across an ensemble of the substantially parallel addresses.

Turning to figure 2, the present invention also relates to embodiments of a method for providing distinct color in an LCD apparatus having at least two layers of respectively disparate encapsulated liquid crystal materials, structural means for maintaining the layers proximate to each other and in a substantially parallel orientation, electrically conductive means for addressing at least one substantially parallel address across the encapsulated liquid crystal material in each of the respective layers; and an electrical pulse driving means coordinated

with the means for addressing, and the method includes the steps of: (A) selecting (201) a state from the list Homeotropic and planar and (B) communicating (202) the state to a predetermined address between one of the parallel layers.

5

According to the preferred aspect of the method of the present invention, selecting a state includes, for a predetermined location in a predetermined image, evaluating (203) at least one parameter selected from the list: color and gray level; and wherein communicating includes consistently electing (204) a predetermined address that is topologically parallel to the location in the predetermined image.

10

Furthermore, according to the preferred embodiment of the instant method, selecting a state is in accordance with the gray level and the selecting is a time domain dithered mixture of planar and Homeotropic States. In the present context, time domain dithering relates to selecting the frequency of the duration voltage driving fragments (components of AC, bDC, tbMC, combinations, or the likes – as defined above) in each state so that there is little or no appearance of visual flicker – gray level instability or fluctuation.

15

20

In summary, in conventional use of stabilized cholesteric texture devices, the stabilization of the planar and focal conic texture is optimized by either surface forces or polymer network within the LC fluid. However, in the context of the present invention - a direct drive situation, this optimization of the stability of the two states is not relevant any more. Usually the stabilization is to stop the focal conic spontaneously reverting (albeit maybe slowly) to the planar texture. Thus, one can optimize the surface to give the best possible planar state and not worry about stabilizing the unwanted focal conic state.

25

30

The conditions that optimize the reflectance of the planar state are linked to the viewing angle which in turn is linked to the number of 'domains' and the

orientation that exist in the planar state. When the planar state is formed by removing an electric field, according to the present invention, very many random domains can be seen. Microscopically, these cause light scattering to occur and reduce the pureness of the reflected color; but also give a wider viewing cone over which the reflected color does not change. Thus, if there are fewer domains, then the angle of view will be smaller but the brightness on axis is higher. A partial technical object of the present invention is to substantially optimize the alignment so the LC gives a high reflectance with adequate viewing angle for applications; without the constraint of stabilizing the focal conic state. At present, it is indeterminate what this will mean for the alignment requirements, but one might guess that a low energy surface could help; which would not stabilize the focal conic state.

NOTICES

The present invention has been described with a certain degree of particularity, however those versed in the art will readily appreciate that various modifications and alterations may be carried out without departing from either the spirit or scope, as hereinafter claimed.

In describing the present invention, explanations have been presented in light of currently accepted Technological, or Scientific theories and models. Such theories and models are subject to changes, both adiabatic and radical. Often these changes occur because representations for fundamental component elements are innovated, because new transformations between these elements are conceived, or because new interpretations arise for these elements or for their transformations. Therefore, it is important to note that the present invention relates to specific technological actualization in embodiments. Accordingly, theory or model dependent explanations herein, related to these embodiments, are presented for the purpose of teaching the current man of the art how these

embodiments may be substantially realized in practice. Alternative or equivalent explanations for these embodiments may neither deny nor alter their realization.

Claims

1. A distinct color LCD apparatus including

5 A. at least two layers of respectively disparate encapsulated liquid crystal materials;

B. structural means for maintaining said layers proximate to each other and in a substantially parallel orientation;

10 C. electrically conductive means for addressing at least one substantially parallel address across the encapsulated liquid crystal material in each of the respective layers; and

D. coordinated with said means for addressing, an electrical pulse driving means (I) wherein a state is selected from the list Homeotropic and planar and (II) whereby said state is communicated to a predetermined address between one of said parallel layers.

15 2. The distinct color LCD apparatus according to claim 1 wherein at least one layer of the at least two layers is a pair of glass plates.

20 3. The distinct color LCD apparatus according to claim 1 wherein the at least two layers includes a front plate made of glass.

4. The distinct color LCD apparatus according to claim 1 wherein the at least two layers includes a back plate made of glass.

25 5. The distinct color LCD apparatus according to claim 1 wherein the at least two layers includes a back plate made of a nonvolatile inert solid material.

30 6. The distinct color LCD apparatus according to any of claims 2 thru 5 wherein the at least two layers includes at least one interstitial membrane.

7. The distinct color LCD apparatus according to claim 4 or 5 wherein the back plate is colored black.

5 8. The distinct color LCD apparatus according to claim 4 or 5 wherein the back plate is transparent.

9. The distinct color LCD apparatus according to claim 4 or 5 wherein the back plate is reflective.

10 10. The distinct color LCD apparatus according to claim 4 or 5 wherein the back plate is dichroic.

15 11. The distinct color LCD apparatus according to claim 4 or 5 wherein the back plate is colored with a predetermined spectral bias selected to enhance color characteristics of the most proximate encapsulated LCD material in the at least two layers.

20 12. The distinct color LCD apparatus according to claim 1 wherein the respectively disparate encapsulated liquid crystal materials are each capable of sustaining a transparent state.

25 13. The distinct color LCD apparatus according to claim 1 wherein the respectively disparate encapsulated liquid crystal materials are each capable of sustaining a substantially unique color reflective state.

14. The distinct color LCD apparatus according to claim 13 wherein the at least two layers includes a combination selected from the list:

- A. a red layer and a green layer and a blue layer;
- 30 B. a cyan layer and a magenta layer and a yellow layer;
- C. a red layer and a green layer;

- D. an orange layer and a blue layer;
- E. a yellow layer and a magenta layer.

5 15. The distinct color LCD apparatus according to claim 14 wherein the combination further includes at least one "color" layer selected from the list:

- A. a black near ultra violet layer;
- B. a black near infra red layer;
- C. a black visible spectrum absorptive layer.

10 16. The distinct color LCD apparatus according to claim 1 wherein the electrically conductive means are oriented substantially perpendicular across the encapsulated liquid crystal material in each of the respective layers.

15 17. The distinct color LCD apparatus according to claim 1 wherein the electrically conductive means include ITO on facing surfaces of a layer of the at least two layers.

20 18. The distinct color LCD apparatus according to claim 1 wherein the electrically conductive means include vapor deposited conductors on facing surfaces of a layer of the at least two layers.

25 19. The distinct color LCD apparatus according to claim 1 wherein the electrical pulse driving means includes a Time Domain modulated signal and the signal is elected to have substantially at least one portion of an ensemble of portions providing a Homeotropic State and substantially at least one portion of the ensemble of portions providing a planar state; thereby facilitating maintaining a predetermined gray level.

20. The distinct color LCD apparatus according to claim 1 wherein the electrical pulse driving means includes a waveform selected from the list: Alternating Current (AC), Balanced Direct Current (bDC), Time Balanced Modulated Charges (tbMC), combinations of the aforesaid, and any of the aforesaid within a predetermined decay envelope.

21. The distinct color LCD apparatus according to claim 1 wherein the electrical pulse driving means includes a controller for optimizing refresh time across an ensemble of the substantially parallel addresses.

22. The distinct color LCD apparatus according to claim 1 wherein the electrical pulse driving means includes a controller for minimizing duty cycle across an ensemble of the substantially parallel addresses.

23. A method for providing distinct color in an LCD apparatus having at least two layers of respectively disparate encapsulated liquid crystal materials, structural means for maintaining said layers proximate to each other and in a substantially parallel orientation, electrically conductive means for addressing at least one substantially parallel address across the encapsulated liquid crystal material in each of the respective layers; and an electrical pulse driving means coordinated with the means for addressing, and the method includes the steps of: selecting a state from the list Homeotropic and planar and communicating the state to a predetermined address between one of said parallel layers.

24. The method according to claim 23 wherein selecting a state includes, for a predetermined location in a predetermined image, evaluating at least one parameter selected from the list: color and gray level; and wherein communicating includes consistently electing a predetermined address that is topologically parallel to the location in the predetermined image.

25. The method according to claim 24 wherein selecting a state is in accordance with the gray level and said selecting is a time domain dithered mixture of planar and Homeotropic States.

5

For the Applicant, by

Chaim Scheff

Chaim Scheff

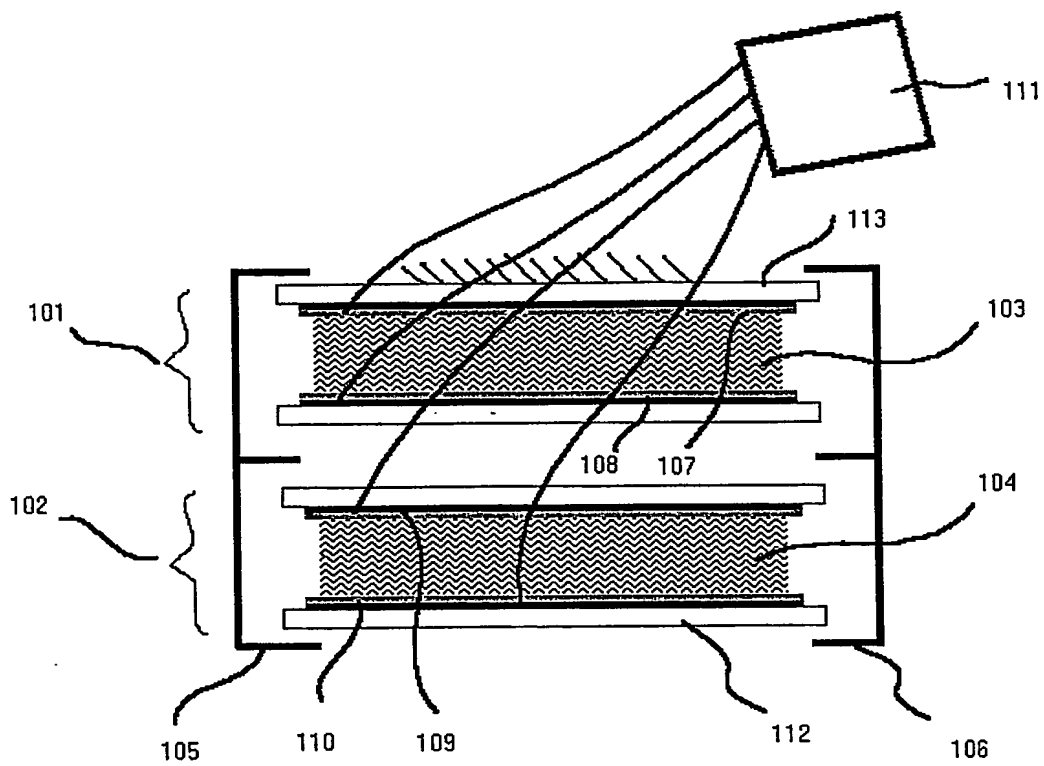


FIG. 1

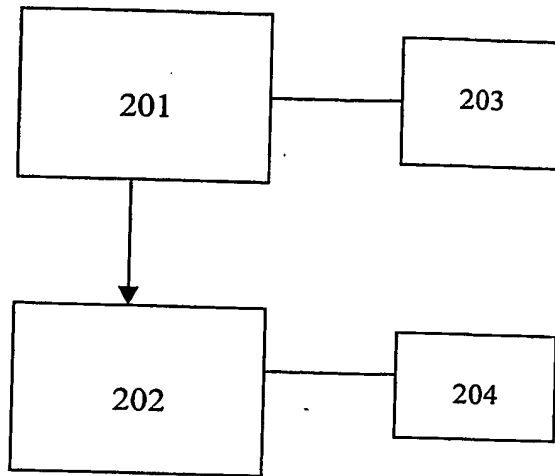


FIG. 2

eme System Overview

Driving SCT Cells and Module

Amir Ben-Shalom

8.4.02

- Confidential -



Contents

System Overview

- Definition
- Electro optic properties of SCT cell
- Electro optic curve.
- Driving parameters
- Other parameters
- Driving matrix (module)
- Summary

Definition

Driving:




- Applying the appropriate voltage to change the SCT material to the desired reflectance state:
 - Planar: maximum reflectance
 - Focal conic: minimum reflectance
 - "Mixed" state: intermediate reflectance level (gray level).
- Regarding to the reflectance after remove the voltage, when the material is stable.

System Overview

Remarks:



• DC Balance:

- The voltage applied to the LC should be zero dc balance (Each pulse should be symmetric)

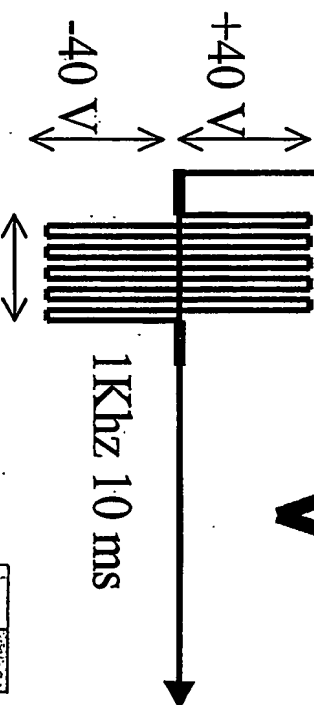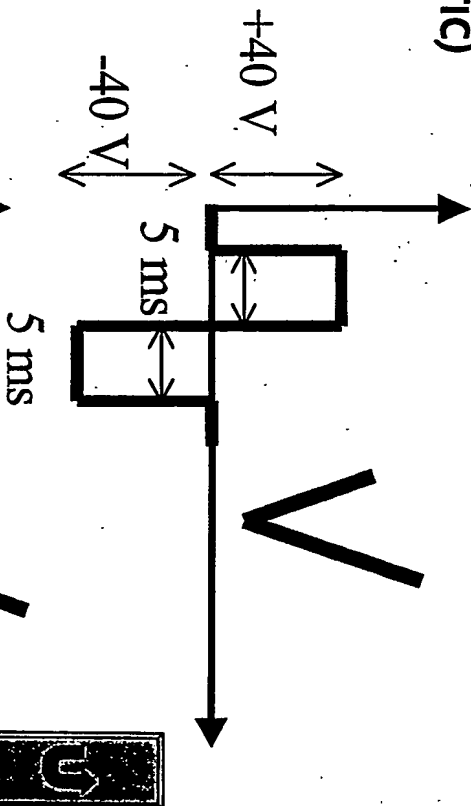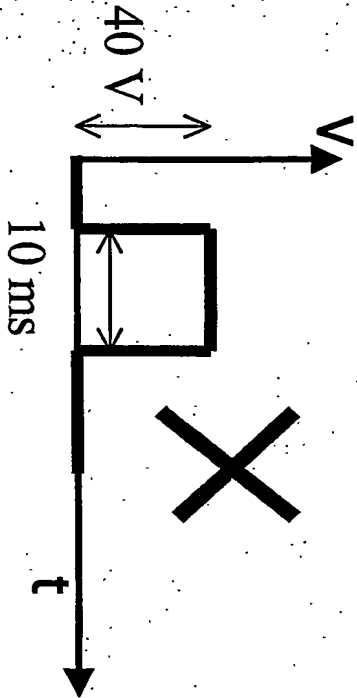

- Confidential -


(23)4



System Overview

Remarks (II):

- SCT does not absorb light (only reflect or transparent) and the black level is achieved by back black paint so:
 - Bright ⇔ High reflection
 - Dark ⇔ Low reflection - high transparency
- In 3 layers - high transparency of one layer improves color purity of the other layers

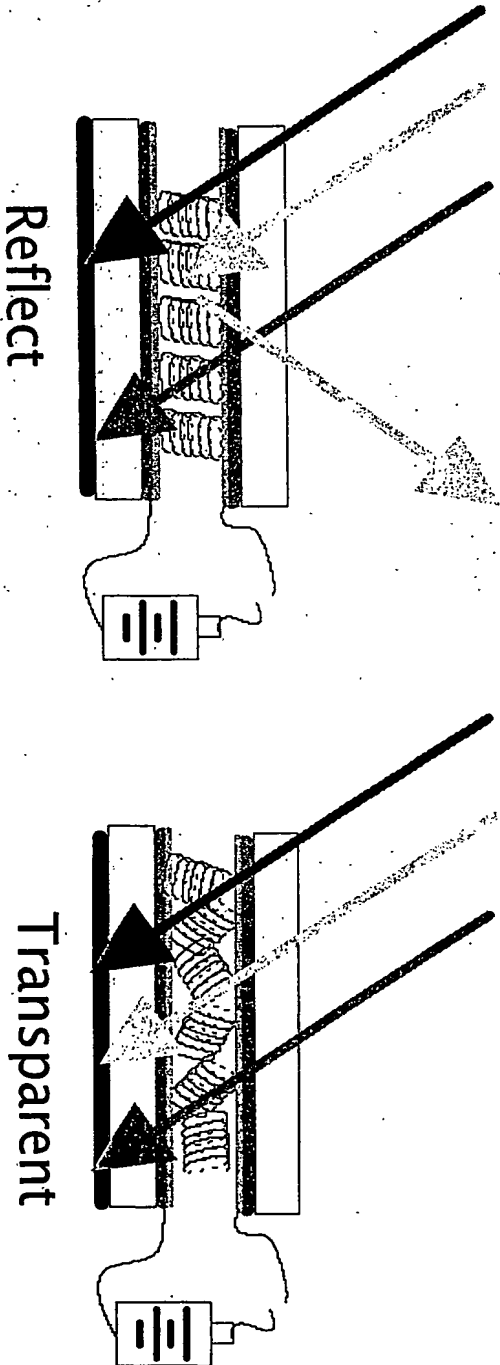


- Confidential -



System Overview


Electrical properties:

- Equivalent electrical model of a single cell:

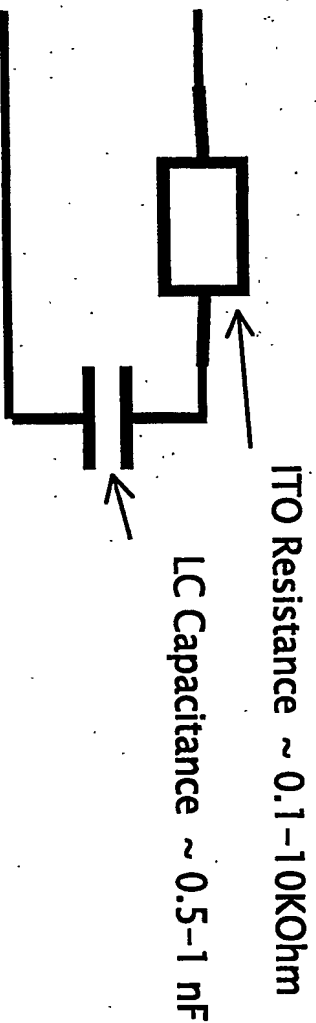

- LC resistance is very high ($> 100 \text{ MOhm}$). Current flows only during charging of the cell.


- Electrical time constant ($< 10 \text{ }\mu\text{sec.}$) is shorter than the "Mechanical/Physical" time constant ($0.1 - 5 \text{ ms}$).

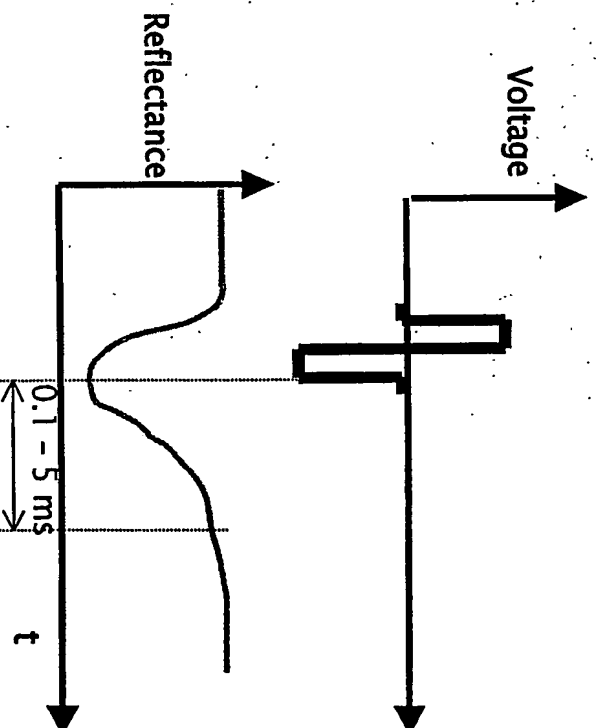


System Overview

Electro optic properties:

- Setting to a planar state can be done by a single pulse that is:
 - High enough (35-55 volt)
 - Long enough (1 - 100 ms)
- Setting to a focal conic state needs more than one pulse and at specific parameters (limited voltage range and time range).
- Setting to the intermediate level (gray level) depends on the former state.
- To ensure driving to the desired reflectance level we start each driving sequence with a "reset" phase that sets the LC into a known state. Usually to a planar state.

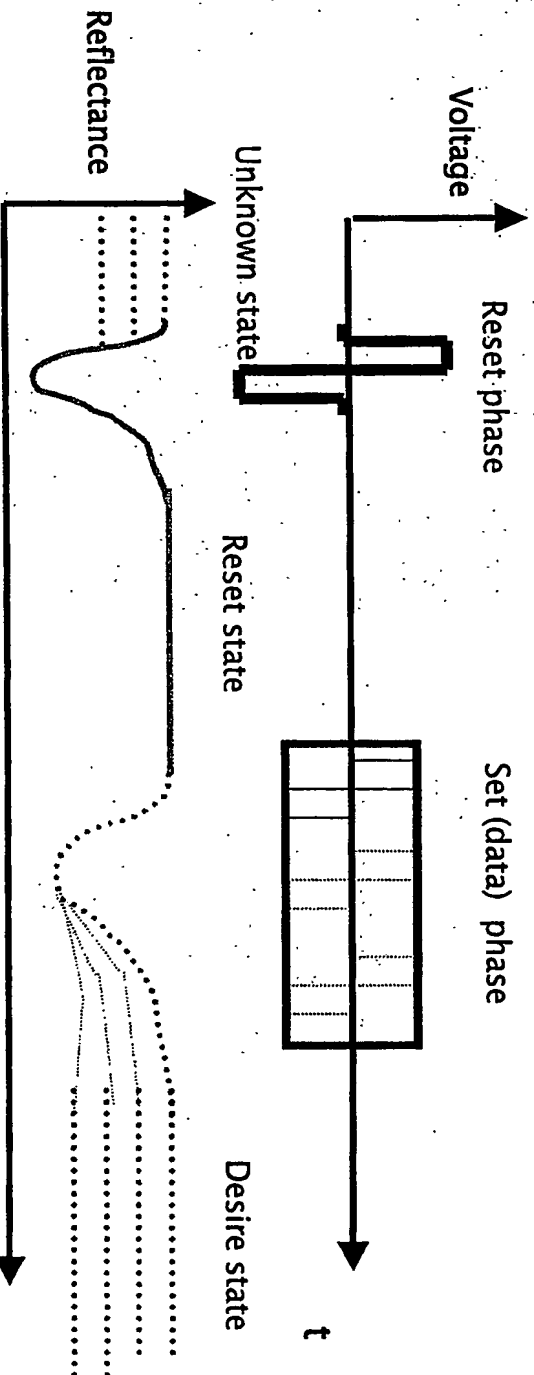


- Confidential -




System Overview

Electro optic curve:


- The reflectance as a function of the data pulse voltage.
- Reflection is measured after the pulse.

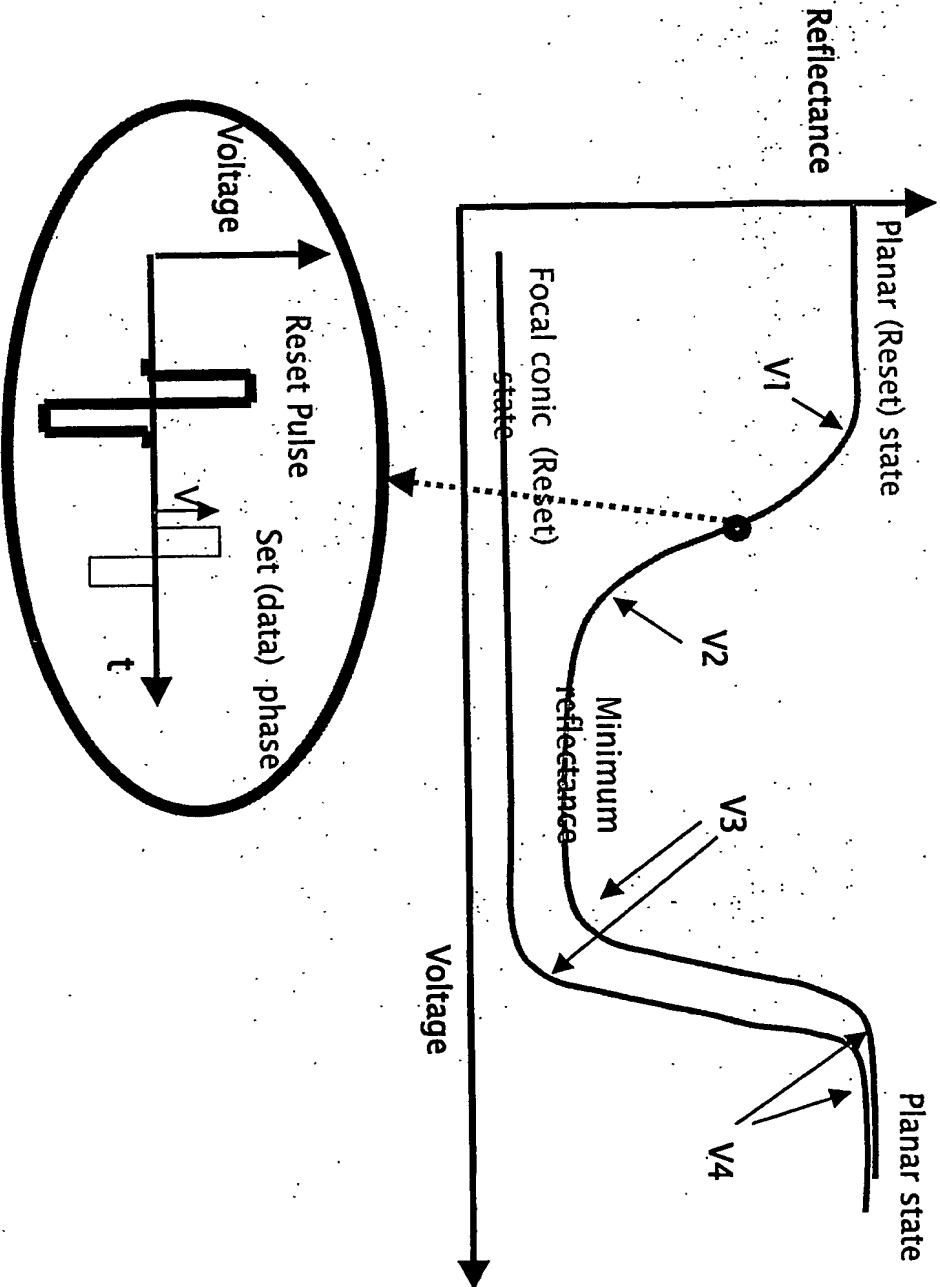

– Confidential –





Electro optic curve (II):

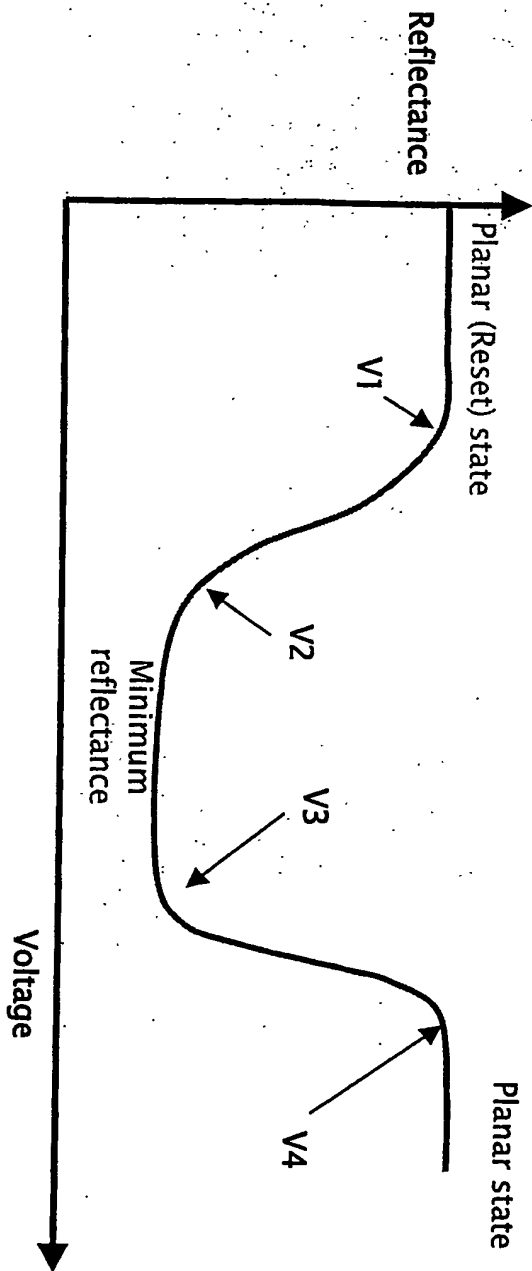

- V1 – Maximum voltage that doesn't change the state of the material.
- V2 – The voltage needed to achieve minimum reflectance
- V1-V2 – Range of gray levels on the left side of the curve
- V3 – Voltage needed to "start" increase reflectance
- V4 – Voltage needed to set the material to planar state !
- V3-V4 Range of gray levels on the right side of the curve.


- Confidential -



System Overview

Driving parameters:

- Pulse time
 - Increased pulse time reduces voltage ("move" the curve to the left).
 - But only up to a maximum time.
 - Above this time - there is no change in the curve.
 - V4 at this maximum effective pulse time determine the minimum voltage that the driving system must be able to supply !!.
- Increased pulse time - decreases the minimum reflectance level in V2-V3 rang. But not down to the optimal focal conic state.

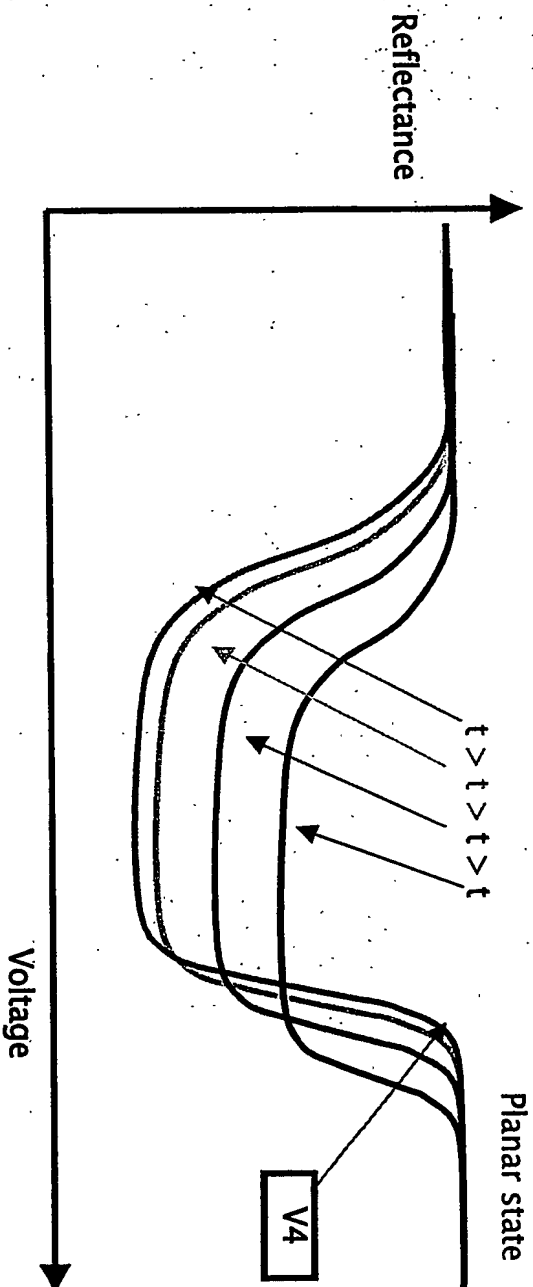


- Confidential -



System Overview

Driving parameters (II):

- Number of driving pulses.
 - More pulses reduce the minimum reflectance in V2-V3 range.
 - But also sharpens the slope of the curve.
 - A minimum delay time between each driving pulse should be set.
 - Usually only the first 4 or 5 pulses are effective.

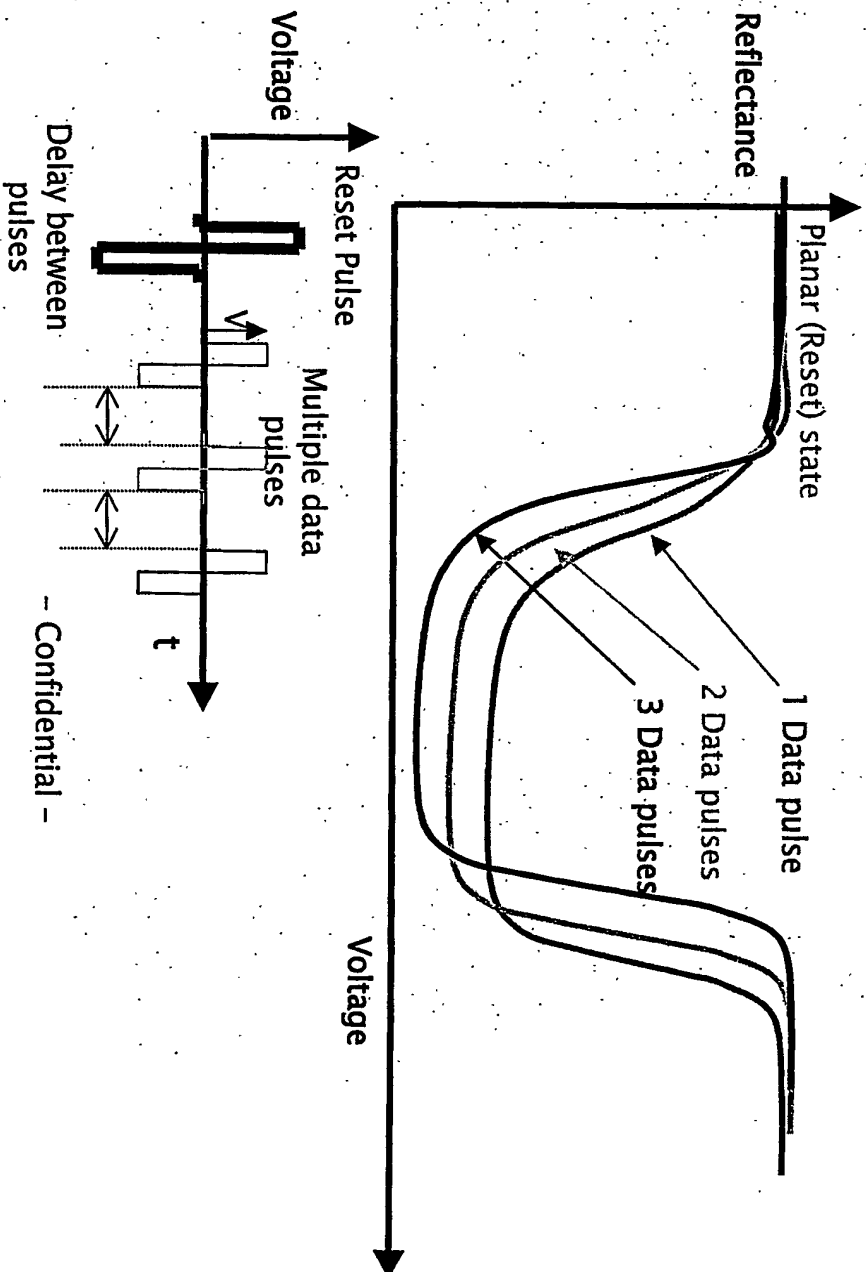


- Confidential -


System Overview

Other parameters:

- Temperature:
 - Increasing the temperature reduces the voltage ("move" the curve to the left).
 - Probably due to lowering the viscosity and order parameter
 - Also reduces reflectance in both planar and focal conic state.
 - This gives an increase in contrast ratio.

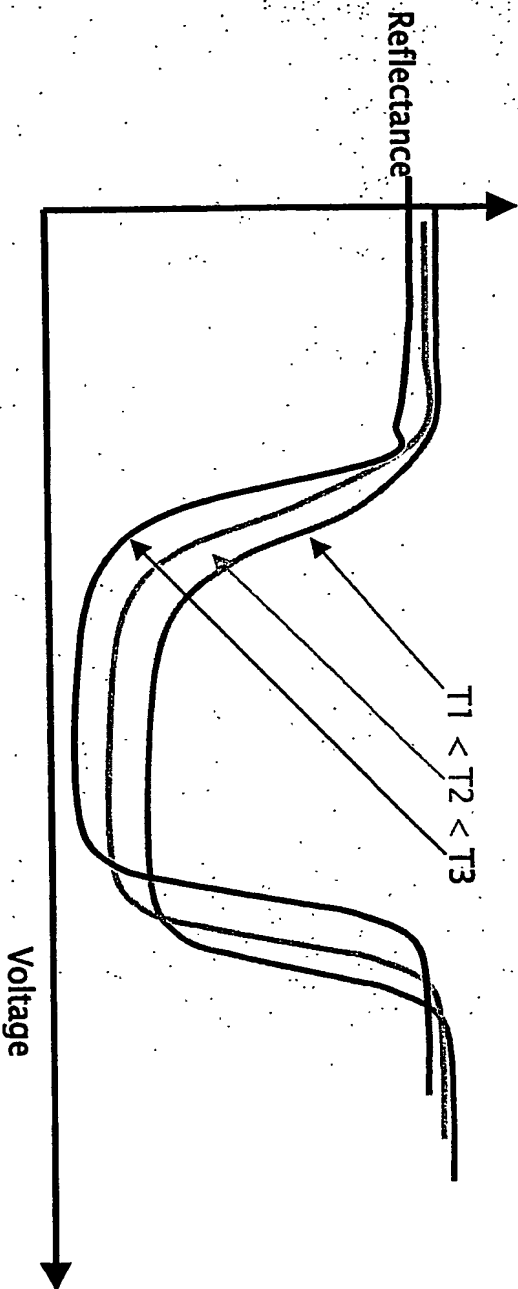


- Confidential -



System Overview

Other parameters(II):


- Cell gap
 - LC mixture
 - Polyimide.
- Depend on color
- Local variation in those parameters in specific areas can cause "locally" shift in the curve and 'stains' (increase or decrease in reflectance of those areas).

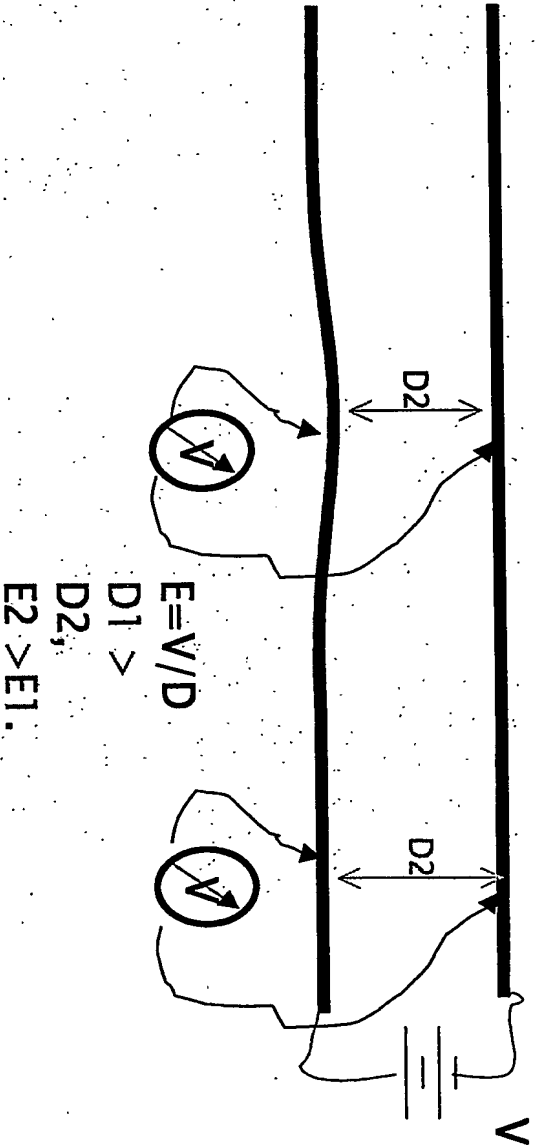



System Overview

Driving on the left side of the curve:

- The slope of the left side of the curve is more moderate
 - V2-V1 range > V3-V4 range
 - Less sensitive to cell gap and local defects
 - Less sensitive to voltage variation.
- Lower voltage need for the data drive phase
 - Less sensitive to variation in voltage source.
 - Less power consumption

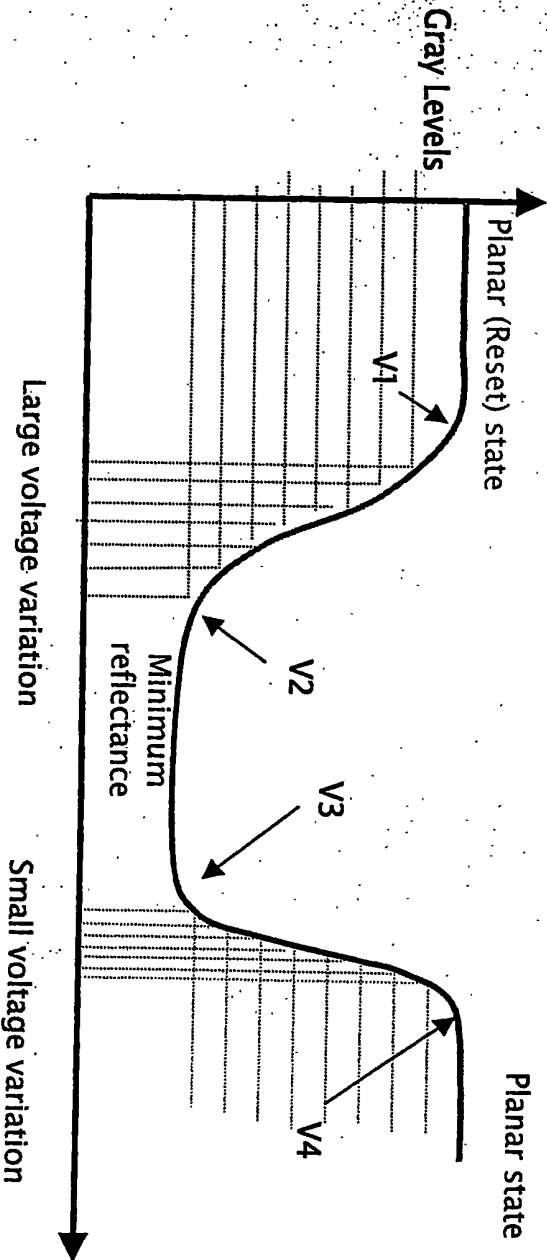

- Confidential -






System Overview

Sample of driving parameters:

- V4 - 38-40 Volt
- V1 - 10-12 Volt
- V2 - 24-26 Volt
- V3 - 34-36 Volt
- Reset pulse time (at 45 Volt) - 50 msec.
- Drive pulse time 2-4 msec.
- Delay between pulses 2-4 ms
- Number of pulses - 2-4

- Confidential -






System Overview

Driving matrix of cells (module)

- The pixels are defined as the intersections between columns and rows.
 - The voltage across the cell is the difference between VC and VR
- In the current module there are 32 rows X 32 columns in each layer and 64 lines are needed to control all the pixels.
- To save lines, the columns of all three layers are connected, so the electric matrix actually driven is 32 columns by 96 rows (128 lines only).

32 Columns

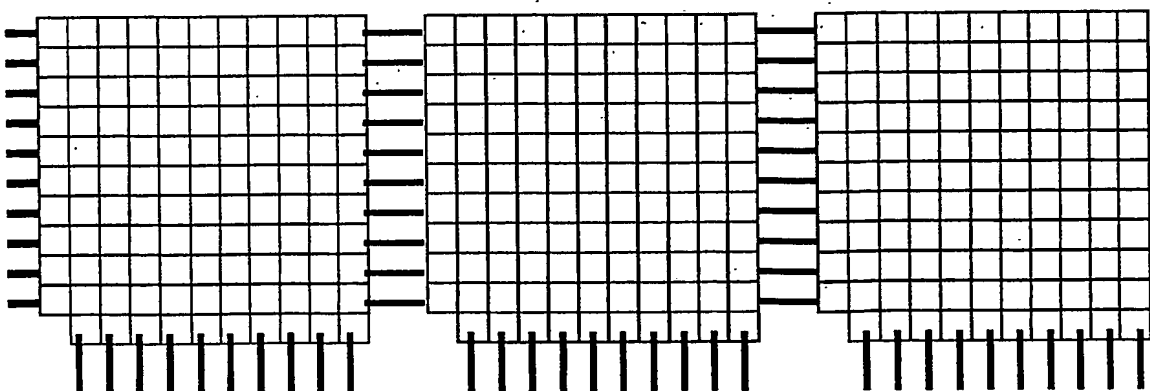

96 Rows

- Confidential -


(23) 16



System Overview

Scanning the matrix

- Update all the (96) pixels of a single column – driving each of those pixels to the desired reflected level)
- While the rest of the picture is unaffected.
 - The voltage across all other pixels is below V_1 .
- Repeat the process for all 32 columns (all the module).
- Scanning the rows (96) needs more time, but can be also done
- Updating a single column or single row only can be done also.


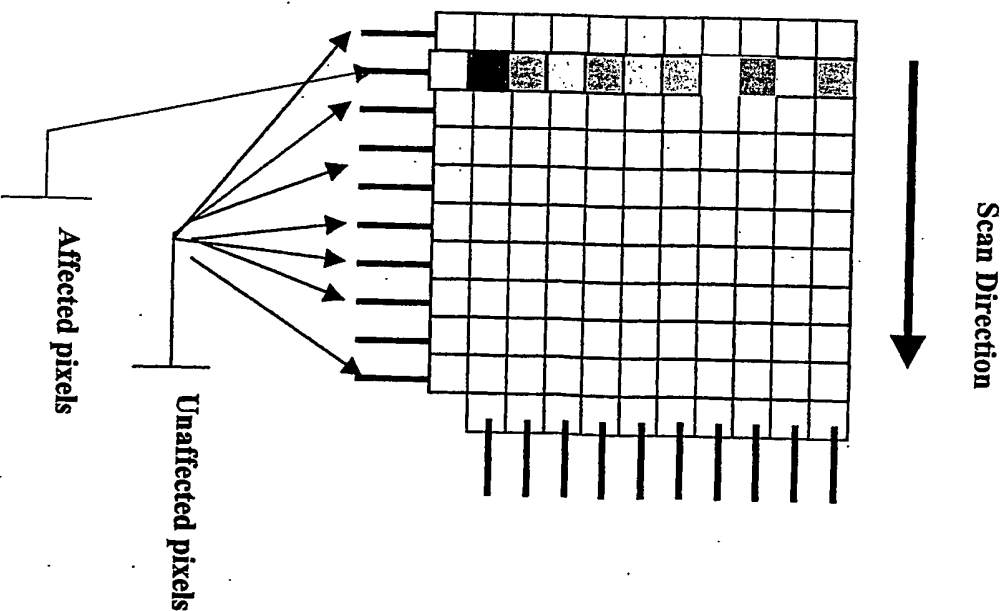




System Overview



Scanning voltage – definition:

- VCActive – The voltage applied on the active column (Common), the one being updated.
 - VCNonActive – The voltage applied to the rest of the columns that are not being updated.
 - VDMax – The maximum voltage applied to the rows (Segments).
 - VDMIN – The minimum voltage applied to the rows.
- 'Best' (Safe) VCNonActive = $(VDMax + VDMIN)/2$

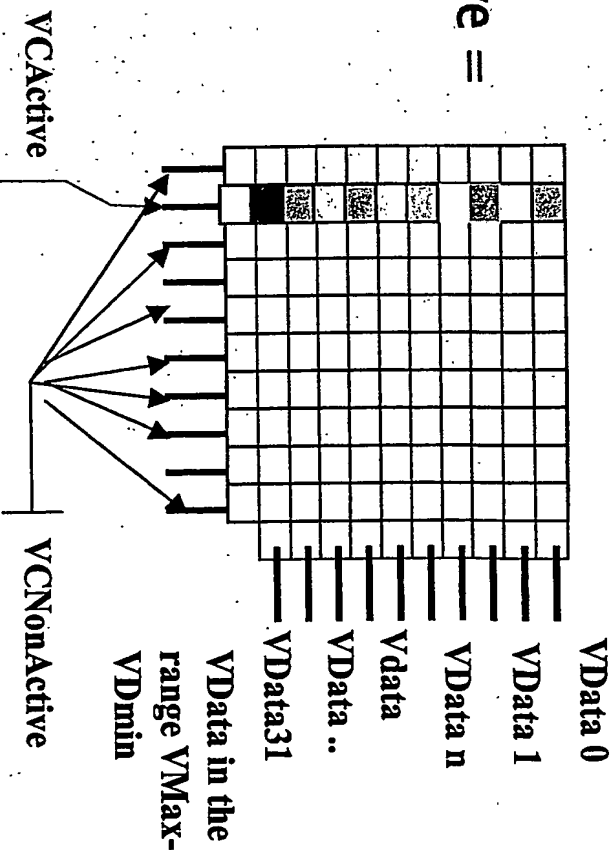

Scanning example (3x3 matrix):

- All pixels are in planer state (planer reset):
- Working on the left side of the curve

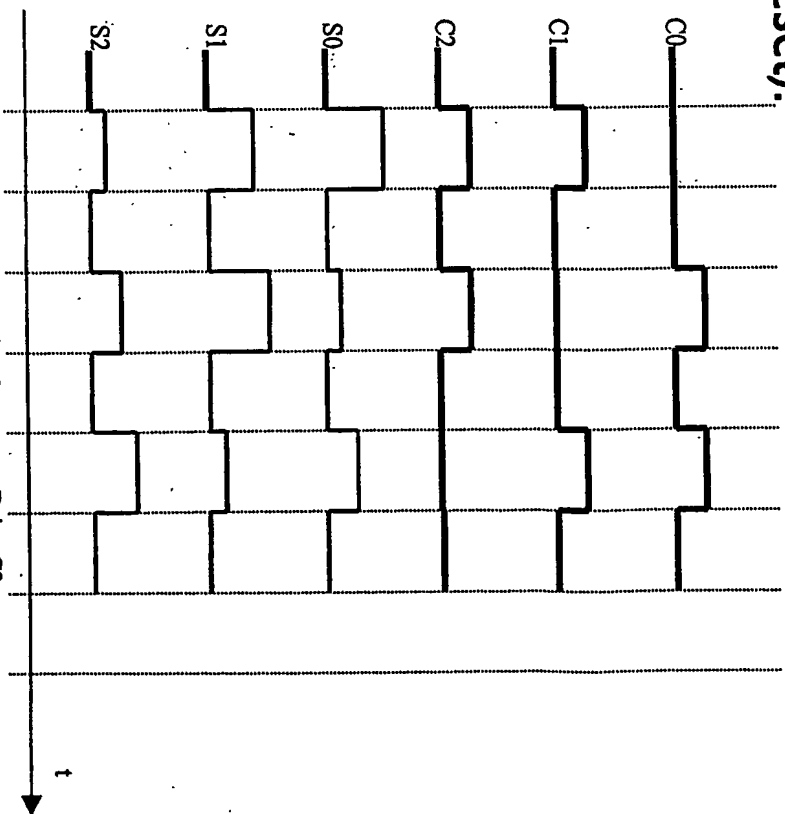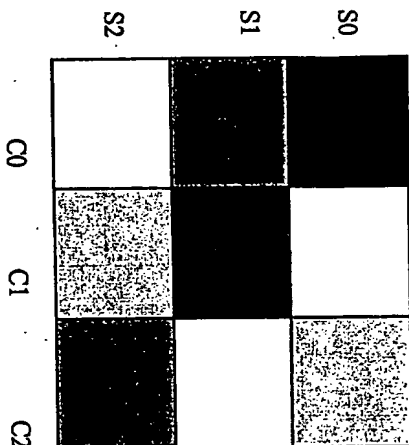



System Overview

In the first series (Drive C0) the voltages are:

- C0 = 0V (VCActive)
- C1, C2 = 20V (VCNonActive)
- S0 = 30V (set COS0 to Dark)
- S1 = 25V (set COS1 to gray)
- S2 = 10V (leave COS2 bright)

- VCOS0 = 30 - 0 = 30 Volt
- VCOS1 = 25 - 0 = 25 Volt
- VCOS2 = 10 - 0 = 10 Volt
- VC1S0 = 30 - 20 = 10 Volt
- VCOS1 = 25 - 20 = 5 Volt
- VCOS2 = 10 - 20 = -10 Volt

- Confidential -



Pixels voltage Conditions and the 1/3

Rule

Working on the left side of the curve ($VC_{Active} = 0$):

- For pixels in the active column, V in the range:
 $VD_{Max} \geq V_2$, $VD_{Min} \leq V_1$
- For other pixels (non active) V in the range:
 $(VD_{Max} - VC_{NonActive}) \leq V_1$, $(VC_{NonActive} - VD_{Min}) \leq V_1$


$$VC_{NonActive} = (V_2 + V_1) / 2$$

$$V_2 \leq 3 * V_1 \text{ (Limitation on the material)}$$

Working on the right side ($VC_{Active} = 0$):

$$VC_{NonActive} = (V_4 + V_3) / 2$$


$$(V_4 - V_3) \leq 2 * V_1$$

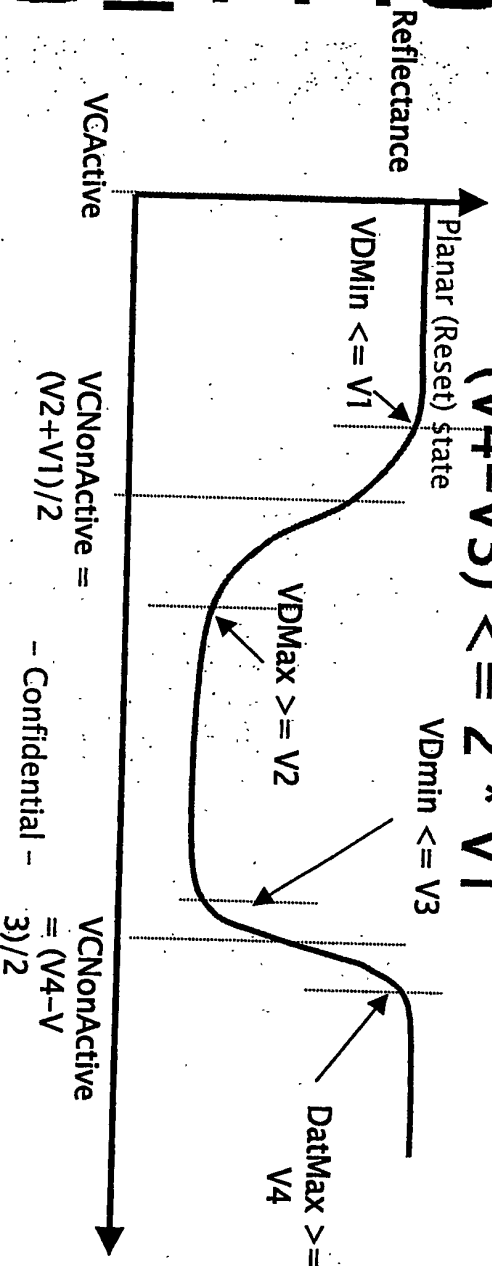

System Overview

Right or left side ?

- Working on the left side of the curve:
 - More gray level.
 - Less sensitive, more stable
 - Less "stain" problems
 - "Material" limitation on V2 and V1
 - More pulses needed to achieve the focal conic state
- Working on the right side of the curve:
 - More sensitive, less stable.
 - More chance to "stain" problems
 - Less severe "Material" limitation on V4, V3 and V1
 - Less pulses needed to achieve the focal conic state
- There is an option to combine both methods.





System Overview

Summary:

- Driving SCT cell is based on applying a symmetrical (bipolar) sequence of pulses.
 - Pulses parameters are:
 - Voltage
 - Time
 - Delay between pulses
 - Number of pulses
 - Other parameters that need to be taken into account are:
 - Temperature
 - Cell gap
 - Materials (LC, PI)



Summary (II):

- Normal driving sequence includes:
 - Reset phase – set the material to known state.
 - Data phase – set the material to its final reflectance.
 - After the Data phase the material is stable.
- Reset to Planar state is easily achieved
- Gray level can be achieved on both sides of the electro-optic curve.
- Driving matrix of cells is done by scanning.
- This scanning sets some limitation on the driving voltage that is applied to the rows and columns.
- Usually there is a trade-off between number of gray levels, contrast and total scan time.
- More research and work need to optimize driving scheme according to a specific device.